


BIKE LANE SYMBOL MARKINGS

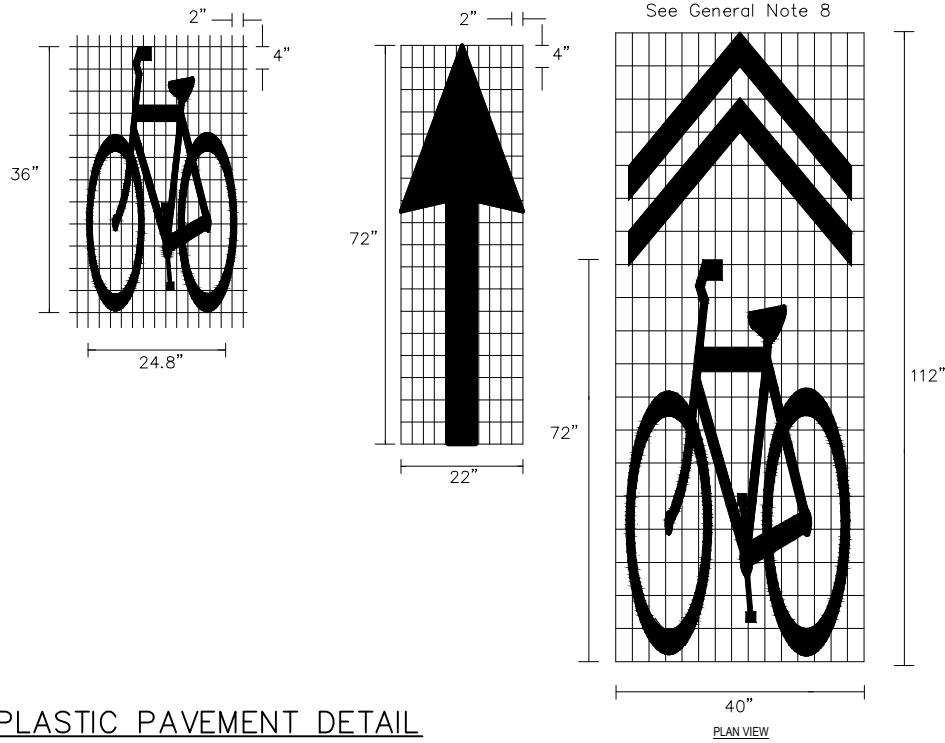

THERMOPLASTIC PAVEMENT DETAIL (NOT TO SCALE)

GENERAL NOTES

1. All bicycle lane pavement markings shall be white unless otherwise noted and approved by the City Staff.
2. All pavement marking materials shall meet the required Public Works Technical Specifications.
3. Exact sign placement and details are shown elsewhere in the plans.
4. The current edition of AASHTO'S Guide for the Development of Bicycle Facilities should be referenced.
5. The "BIKE LANE" (R3-17) sign with the "AHEAD" (R3-17a) sign mounted directly below should be installed in advance of the beginning of a marked bike lane.
6. The "BIKE LANE" (R3-17) sign with the "END" (R3-17b) sign mounted directly below should be installed at the end of marked bicycle lane.
7. Shared-Lane Markings to be placed at least 4' from the face or edge of traveled way where there is no curb.